




*In
Mining and Tunnelling*

Per Ek

Morgårdshammar AB , Sweden.

LX Locomotives - Types

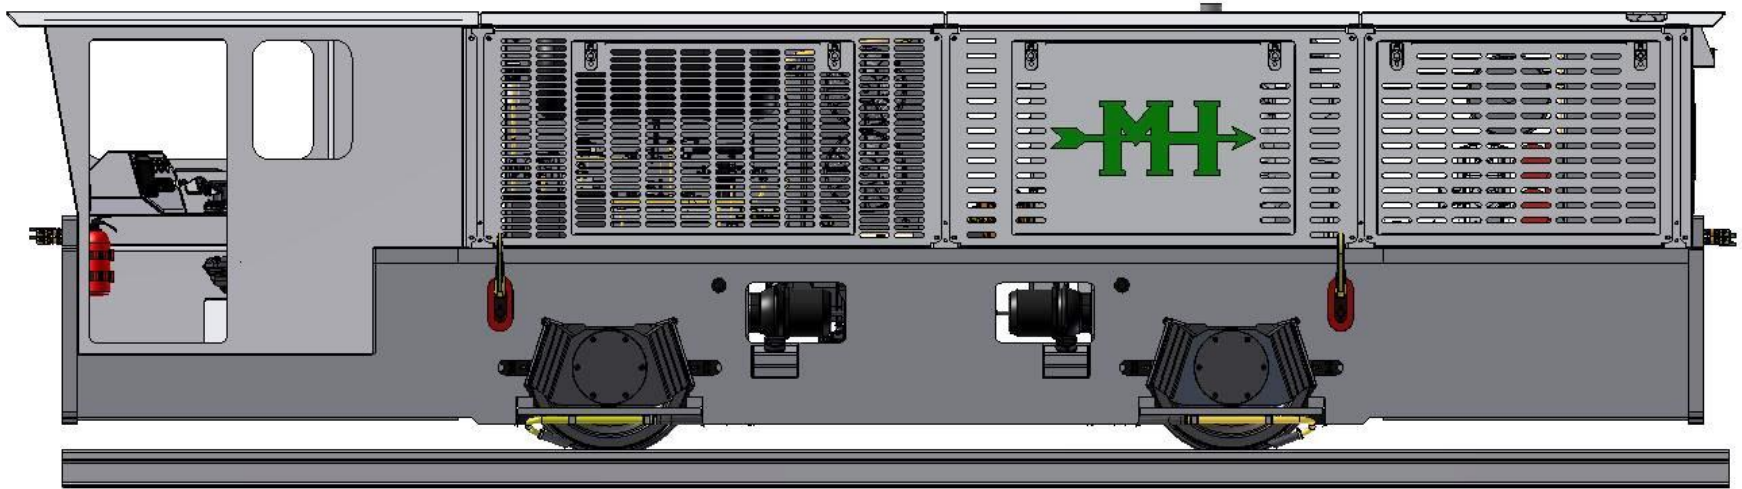


The LX locomotive will come in two types of power train.

- **LX-H** = Hydrostatic with low/high gear in both directions.
- **LX-G** = Gearbox with 2 gears in both directions.



LX Locomotives - Types

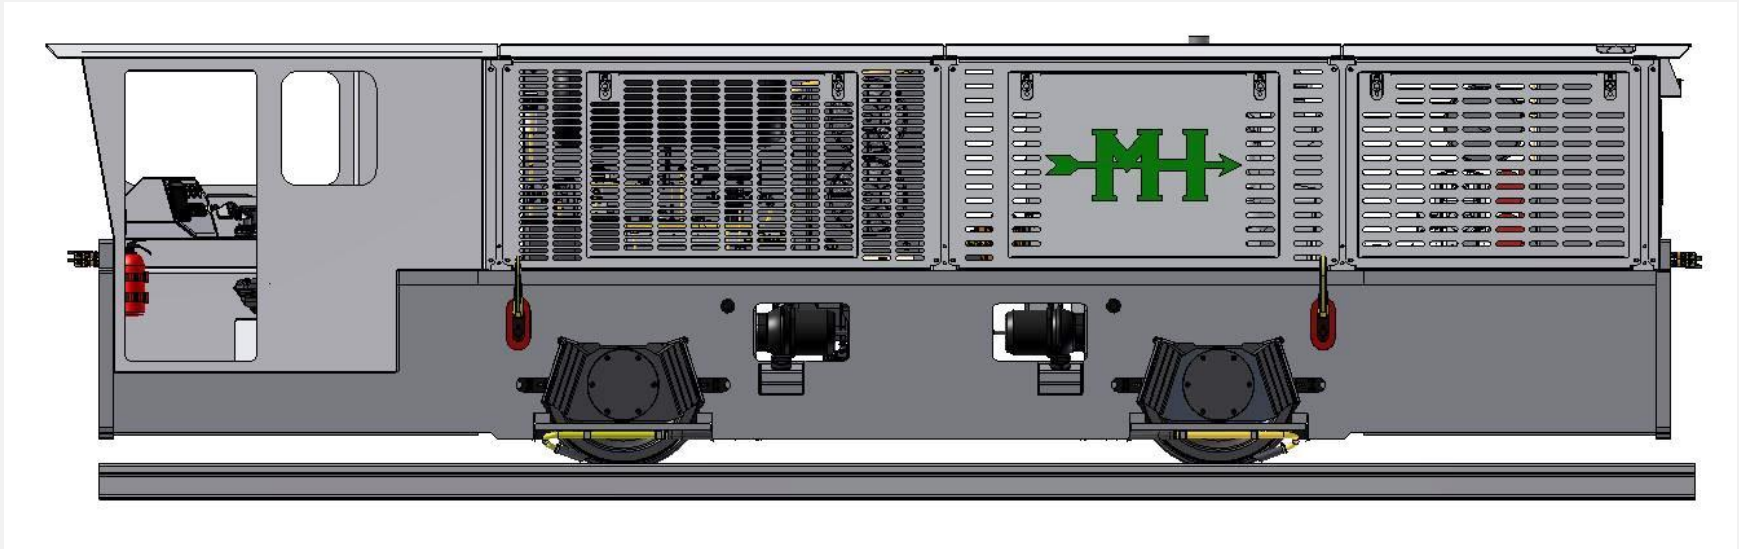


The weight is adjustable and in two models of locomotive.

- 15 – 20 – 25 – 30 ton.
- 35 – 40 – 45 ton - **this presentation.**

Type	M ton	Width	Gauge	Length	Height	Axle dist.
LX 35	35	1550 (*1650)	750-900 (*1000)	7500	2050	3000
LX 40	40	1550 (*1650)	750-900 (*1000)	7500	2050	3000
LX 45	45	1550 (*1650)	750-900 (*1000)	7500	2050	3000

LX Locomotives – Adjustable weight



To adjust the weight of the loco we work with ballast which can be supplied and fitted by MH or by the end user out from supplied drawings.

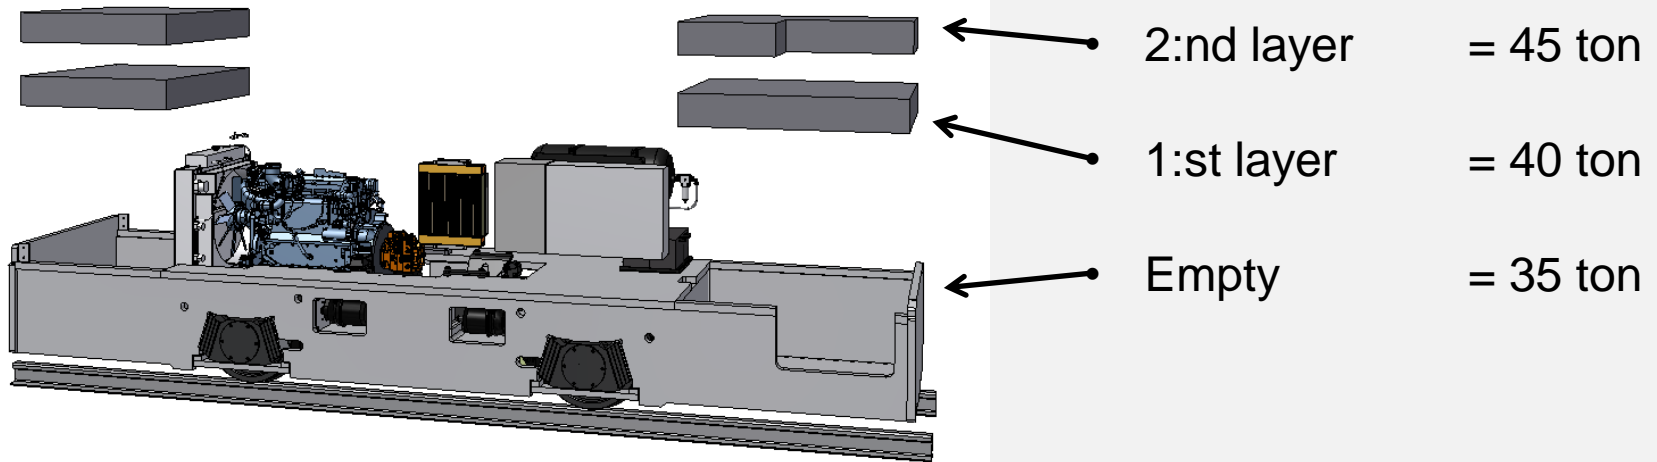


Each ballast have lifting device for easy handling.

LX Locomotives - Modules

The easy design and location of components in a module thinking facilitates operating, maintenance and service in a modern way.

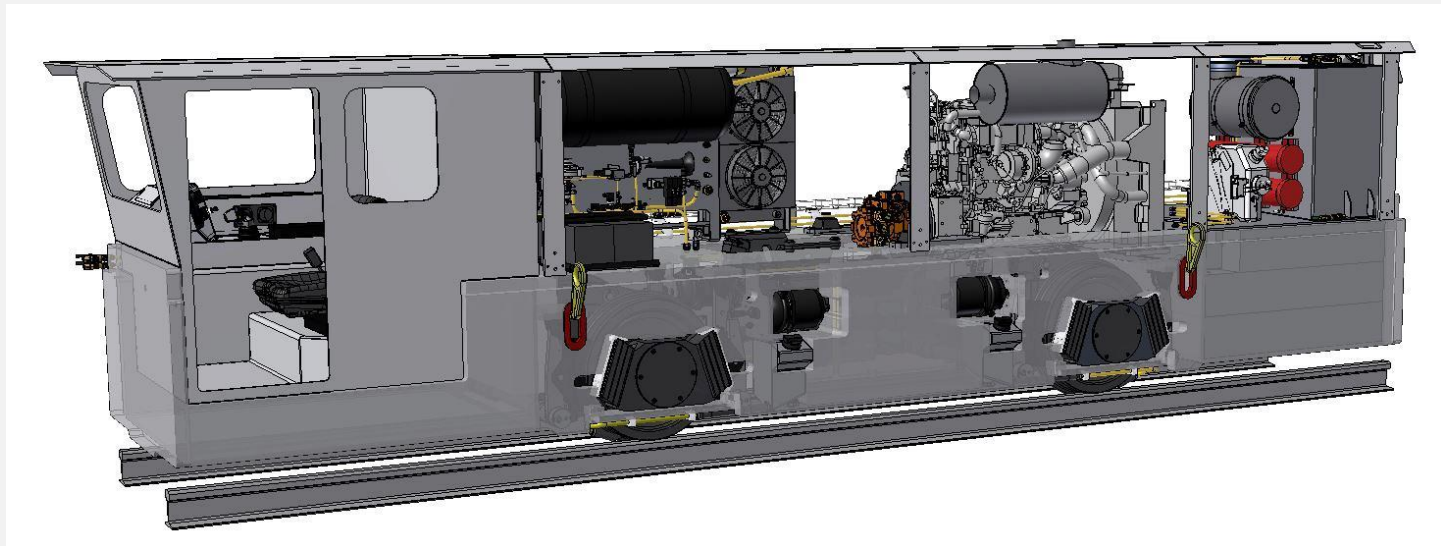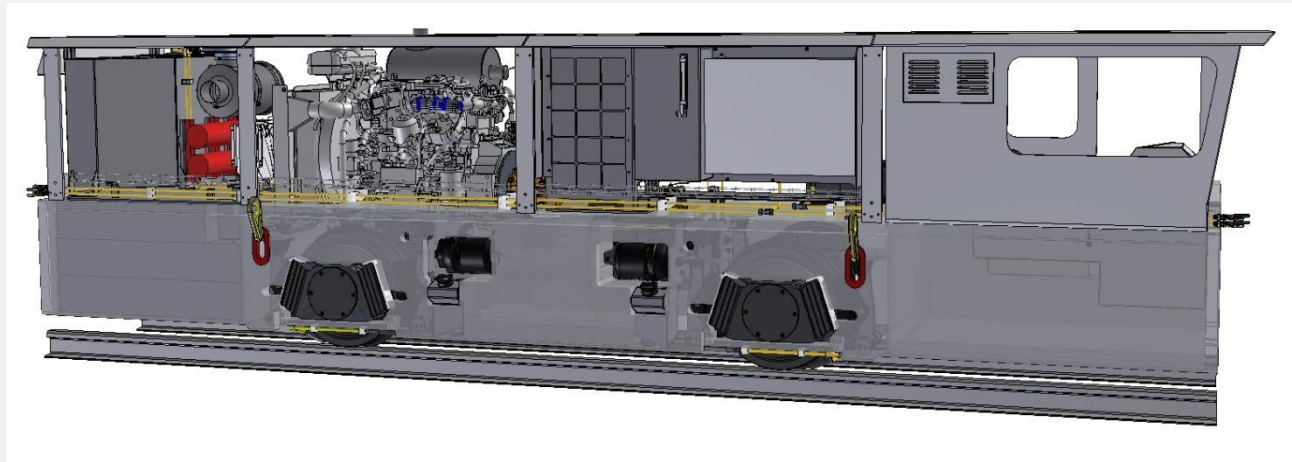

LX Locomotives - Modules

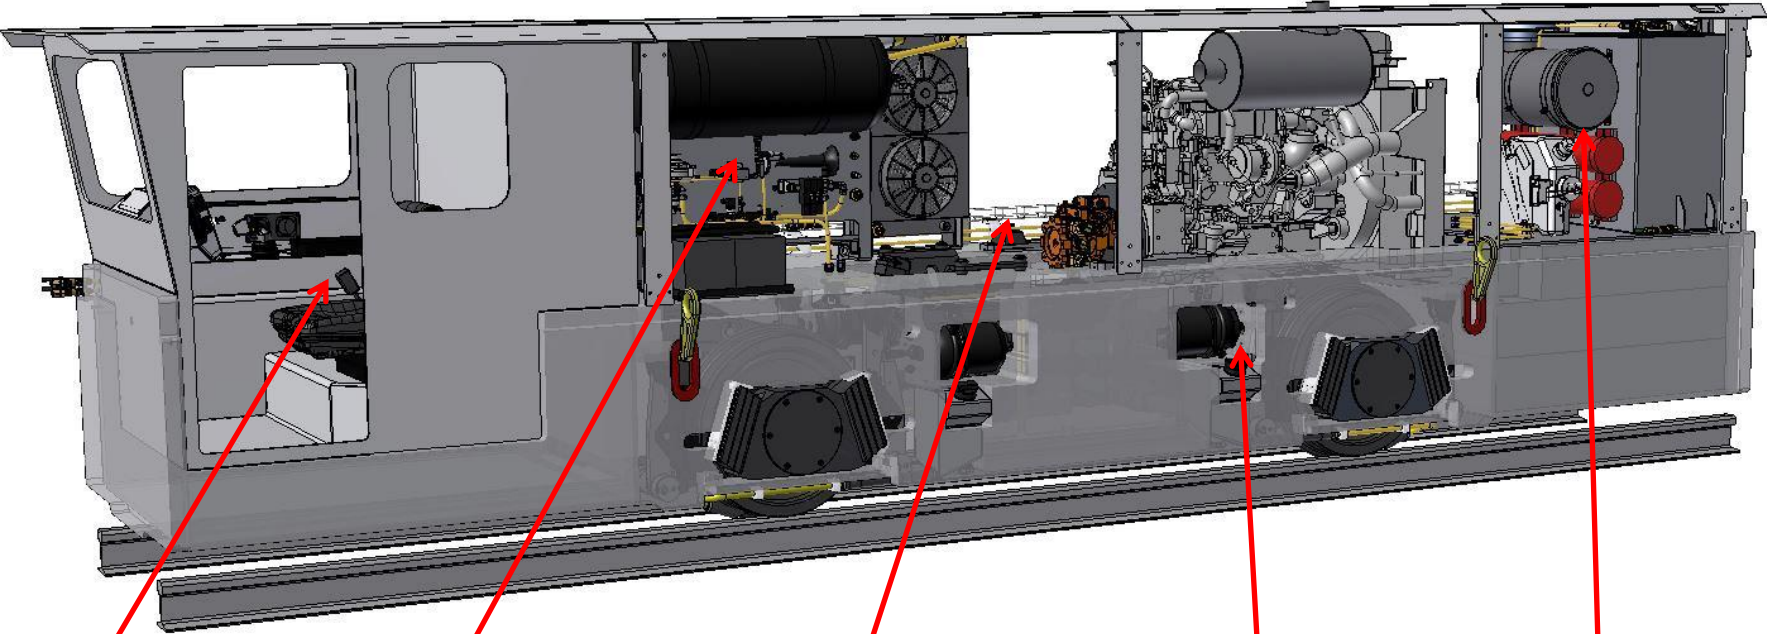

Cabin

Air and hydraulic supply

Engine and powertrain

Brake system

Fuel tank 300L
AdBlue
and
Fogmaker



LX Locomotives - Cabin



Welded steel construction.

Open type in front driving position with window and additional passenger seat.

Ergonomically designed and adjustable driver seat.

Magnetic controlled steel bar at opening which allow driving when fixed.

Option:

- Fully closed with door.
- Heat/AC ventilation.


LX Locomotives - Cabin

Location of each equipment is well thought out to have the most practical way of reach and operation of the loco.

Camera and monitor is standard in cabin.



LX Locomotives - Cabin

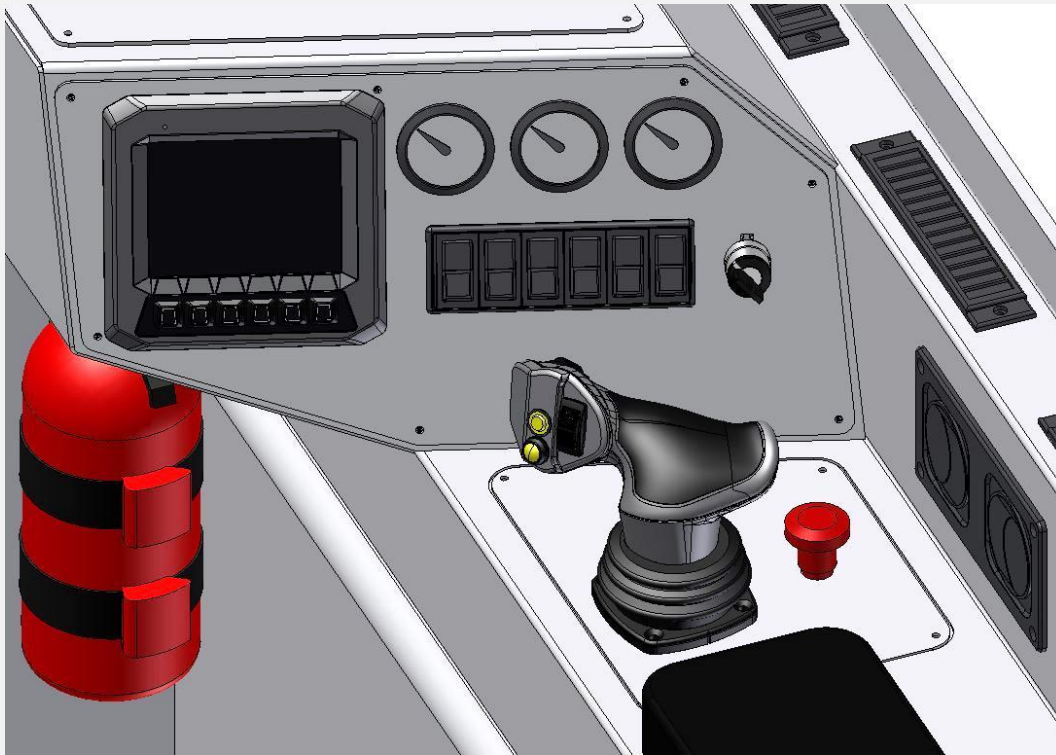

Joystick with, speed/brake control and buttons controlling , FNR, high/low gear, parking brake, sanding device, dead man device and horn.

Buttons for emergency stop and Fogmaker sprinkler system is located beside joystick.


LCD display showing, speed, rpm and engine information. Manometers for reservoir/brake pressure and optional wagon brake.

Extra buttons available for free choice options.

LX - Locomotive



Sanding device

Controlled/activated by button integrated in joystick.

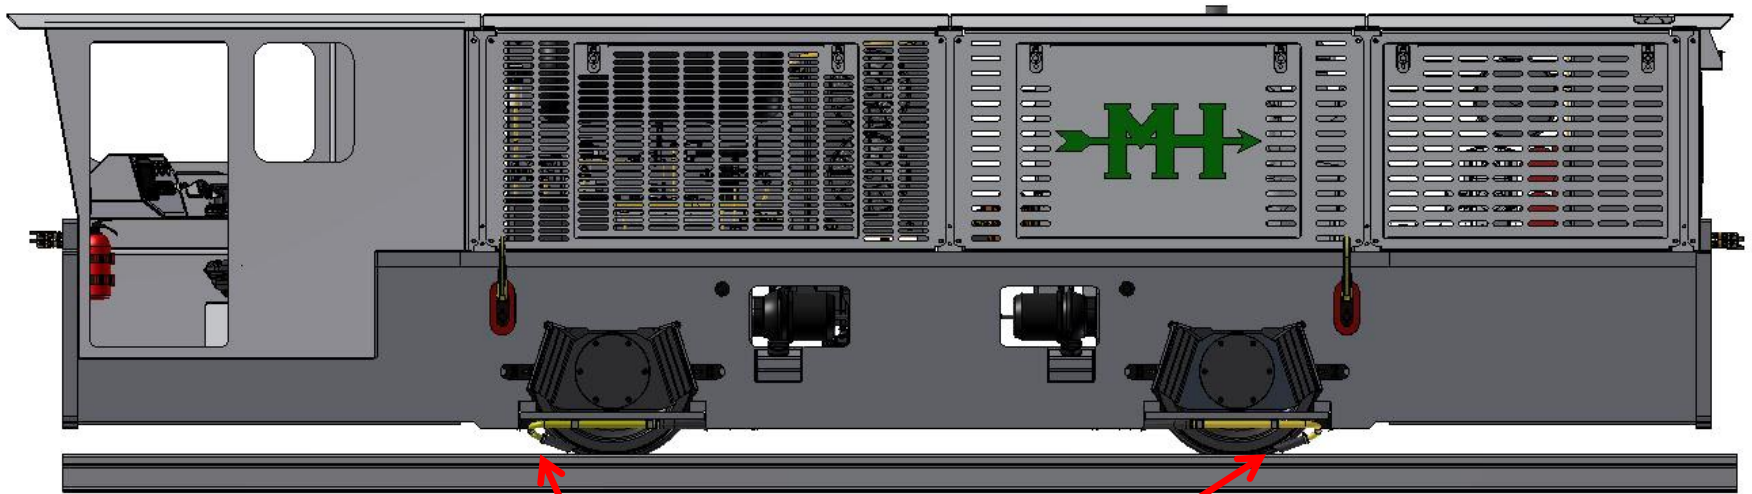

sanding points

LX Locomotives – Air/hydraulic supply

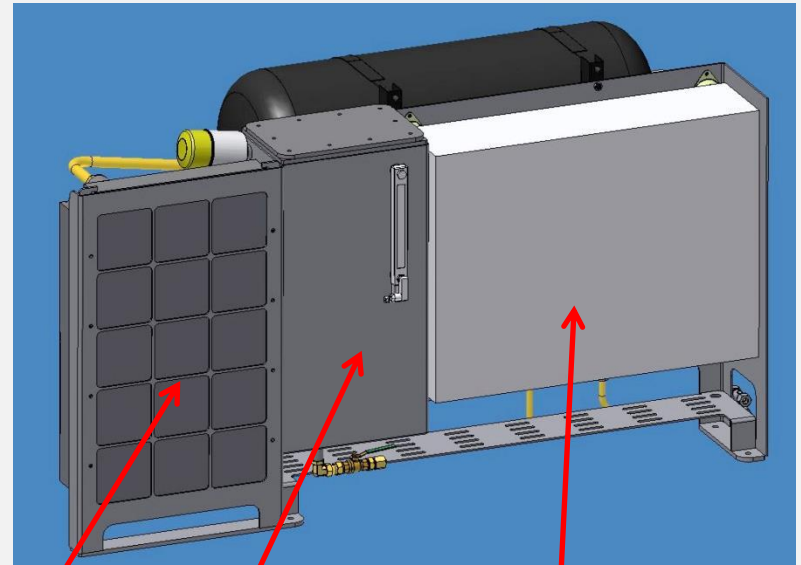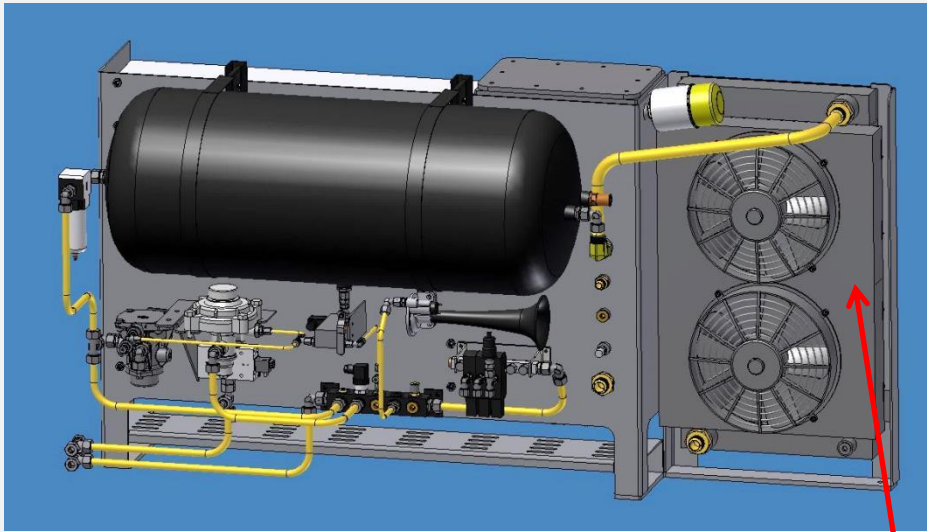

The module for air and hydraulic is well designed to limit the space demand. Part location for easy check and maintenance work.

Volumes

Hydraulic	30L
Fuel tank	300L
Axle gear/each	14L

Cooler and oil tank hydraulic system.


Electric system/cabinet incl. Switch control box with contactor relays etc.

Control voltage	24 V
Battery	2 x 180 Ah
Generator	110 A

LX Locomotives – Powertrain

LX-H

Transmission in reliable hydrostat solution for smooth and well controlled speed regulation mainly consisting of hydraulic pump, valve arrangement, hoses, hydraulic motor and transfer case to enable high and low speed.

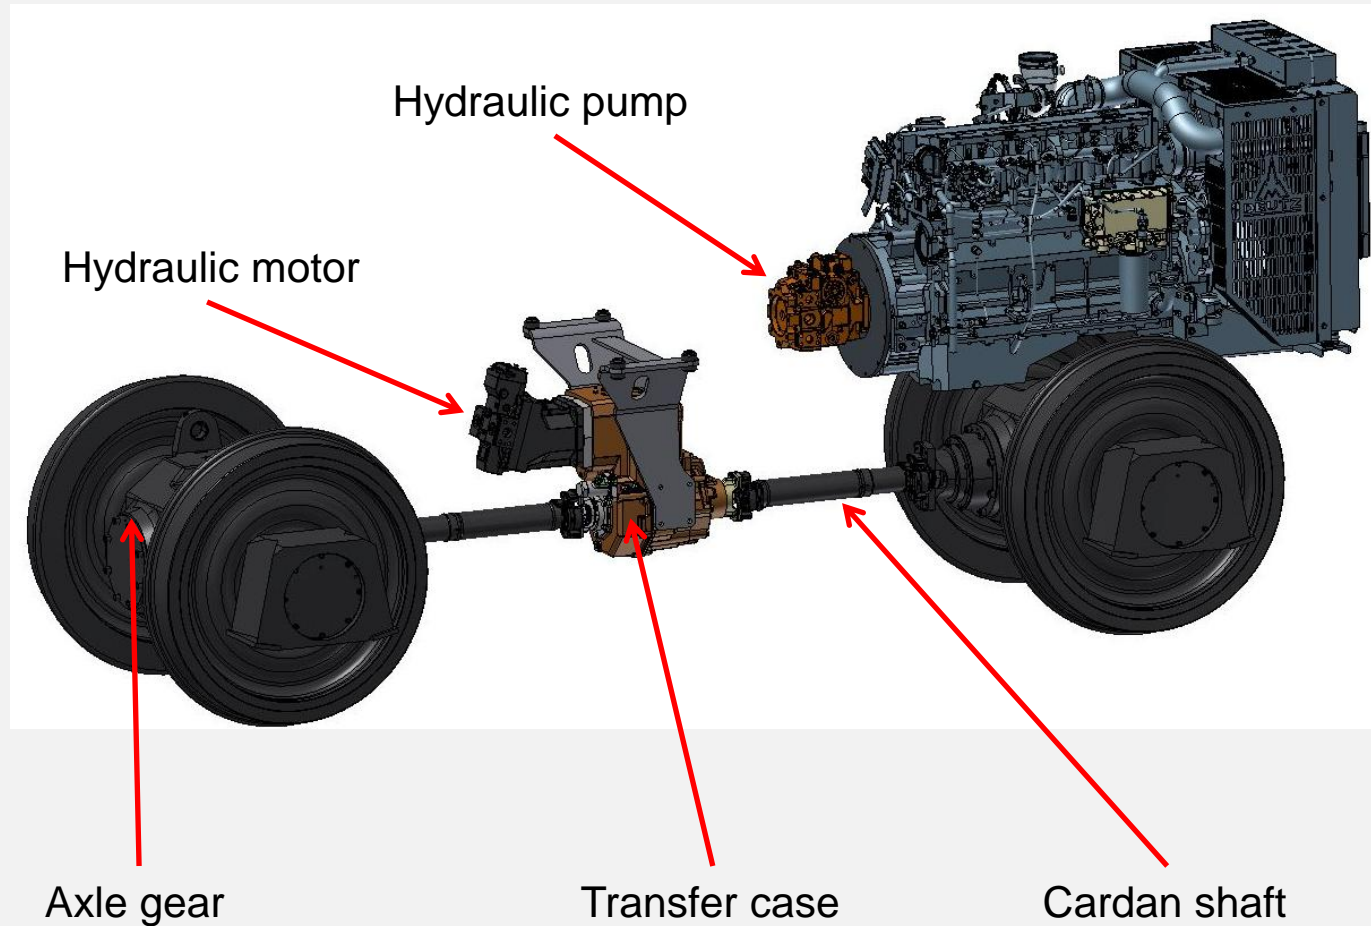



LX Locomotives – Hydraulic Pump

The Danfoss logo is displayed in white cursive script on a red rectangular background.

For LX-H

**H1 Axial Piston Single Pump,
type 130.**

- 130 cm³
- Working pressure 400 bar
- Filter extension incl. for complete system cleaning.

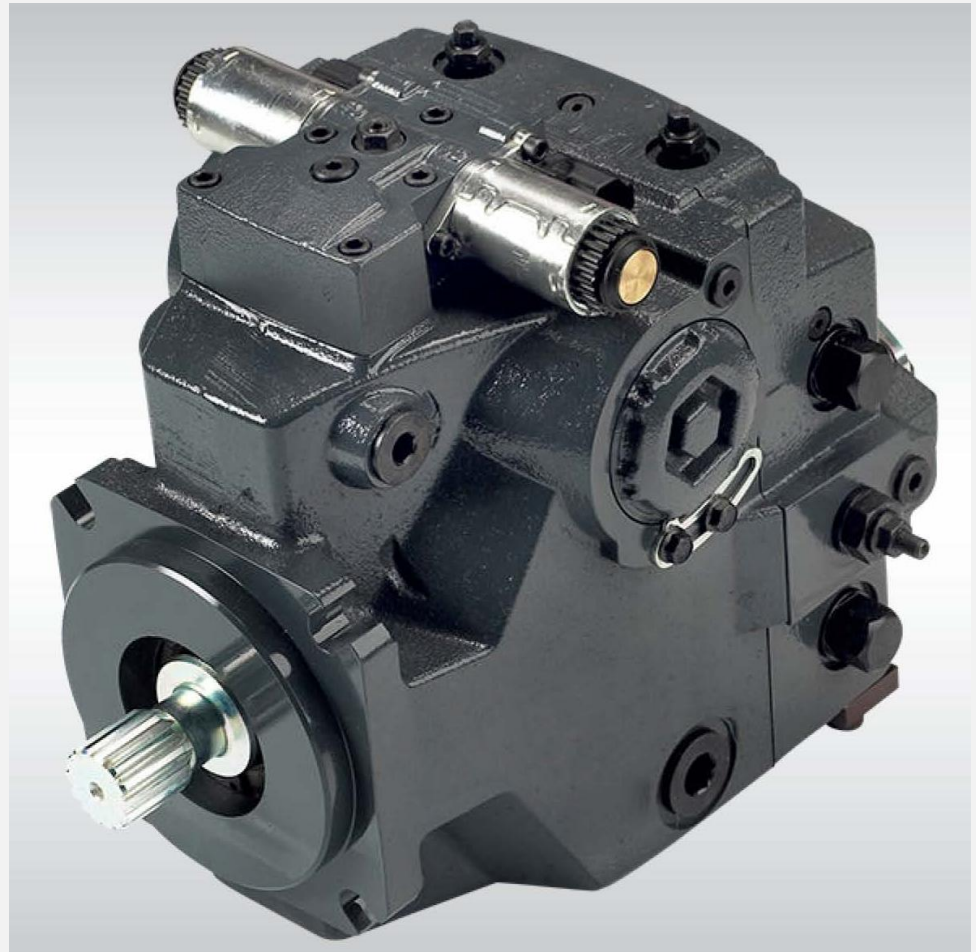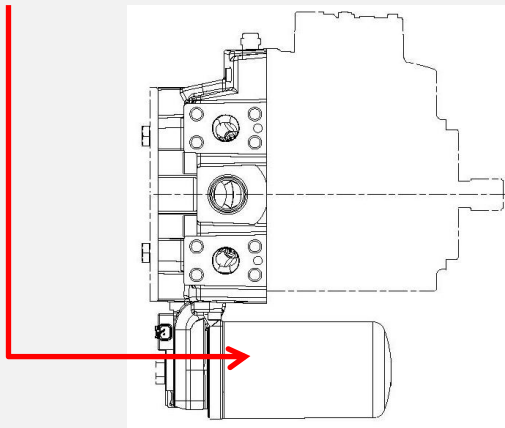


LX Locomotives – Hydraulic Motor

The Danfoss logo is displayed in white cursive script on a red rectangular background.

For LX-H

**H1 Bent Axis Variable
Displacement Motor,
Type 210.**

- 210 cm³
- Working pressure 400 bar

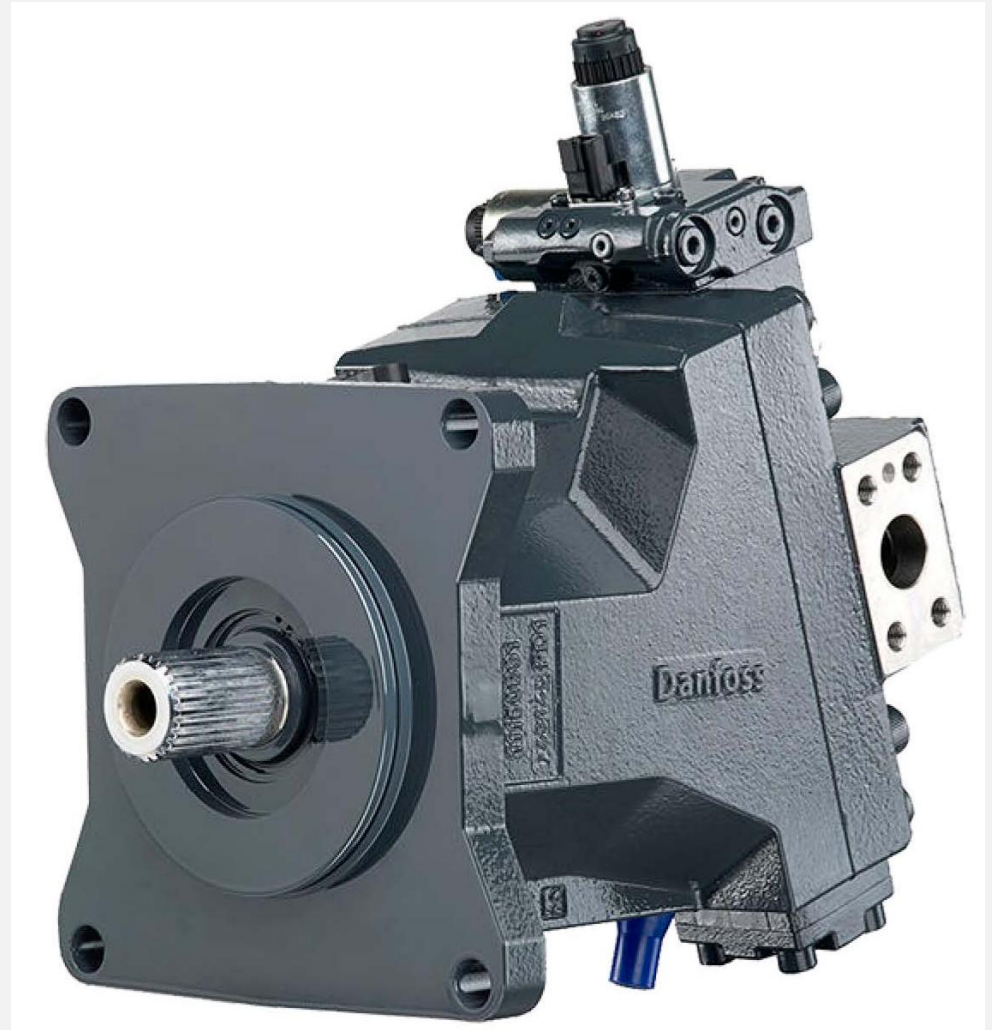

LX Locomotives – Transfer Case




For LX-H

NAF VG 75-560

Hydrostatic Two-Speed Gearbox.


Is specifically designed for hydrostatically driven industrial vehicles which require maximized top speed, efficiency, and tractive effort incl. 4WD disconnect (freewheels).

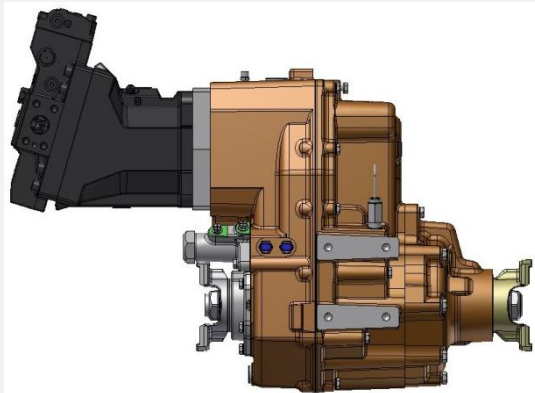

LX Locomotives – Powertrain

For LX-G

The transmission have been specially designed for the most versatile applications in heavy duty work. By optimum matching of transmission hardware and electronic control the unit assure soft 2 gears shift.

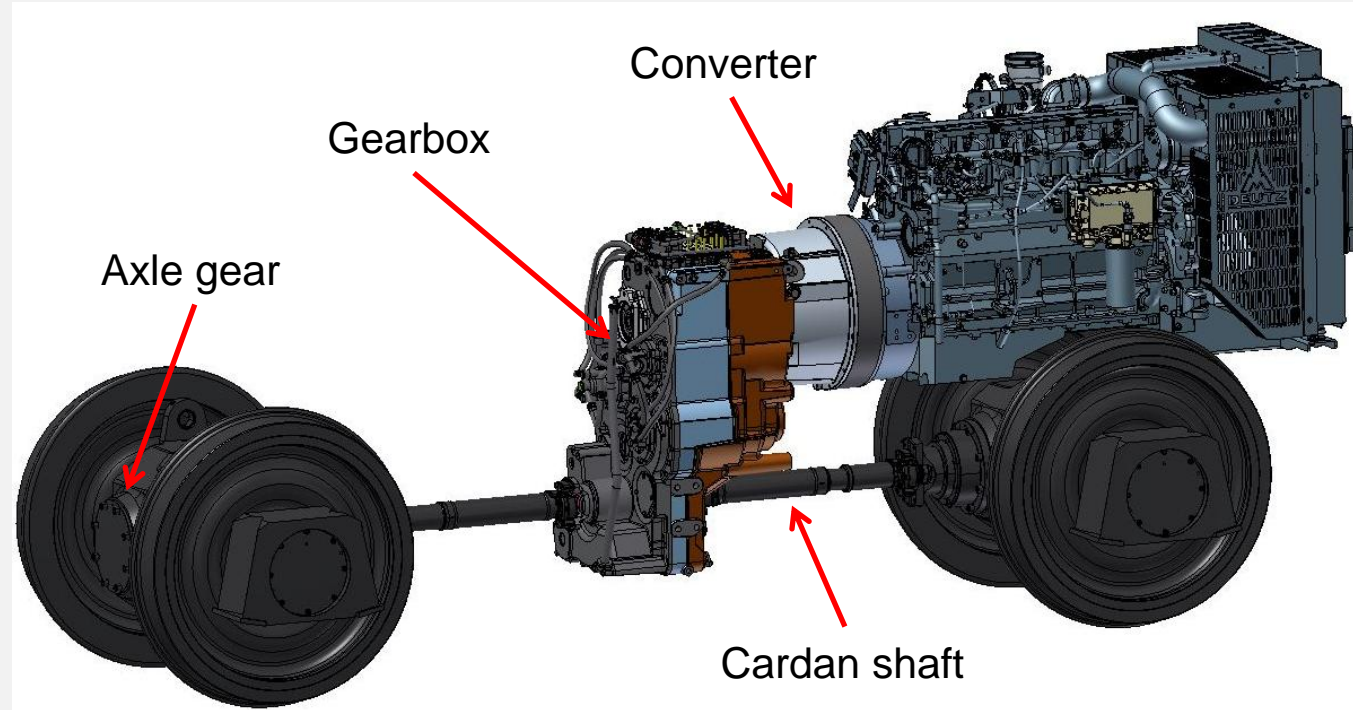

LX Locomotives – Powertrain



For LX-G

ZF WG 310- Long Drop Gearbox



Fully automatic power shift transmission with compact design. No tractive effort interruption during shifting by using proportional valves and highly intelligent software.

Converter with lockup function.



LX Locomotives – Axle gear

The suspension between chassis and axle gears in service free rubber elements of Chevron type mounted on wheel shaft bearing boxes.

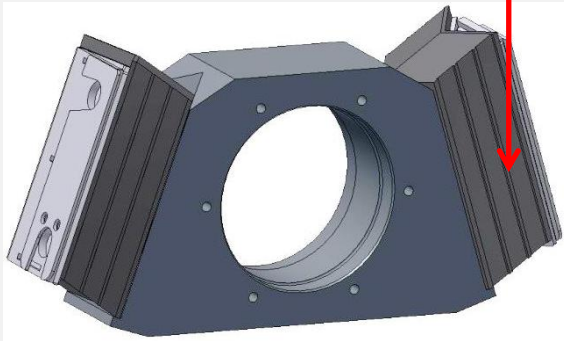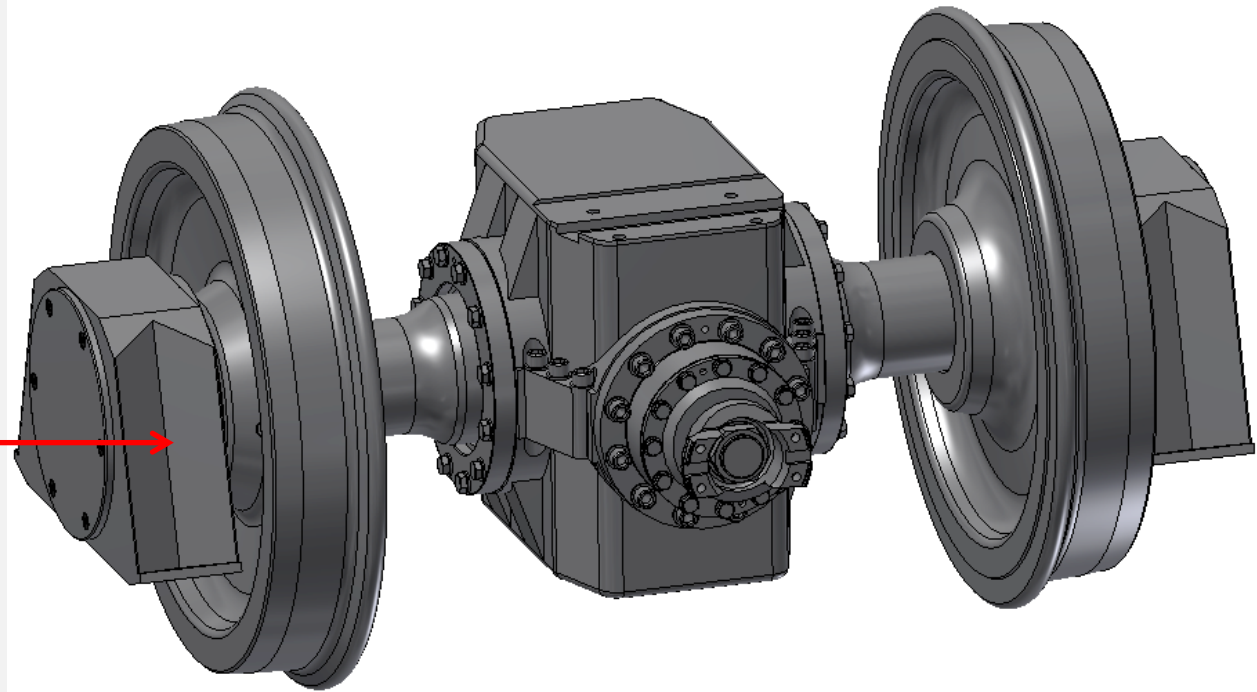


Axle gear

Solid main carrying shaft with centre mounted conical bevel gear carried in spherical roller bearings in wheel boxes.


Wheel \varnothing 920 mm.

LX Locomotives - Brake system

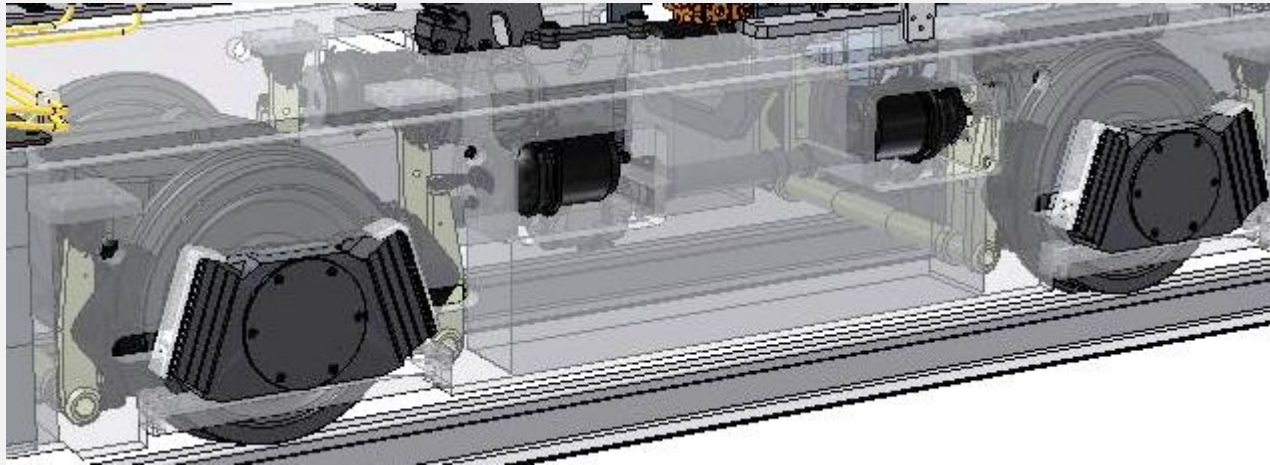

Pneumatically operated brake system consisting of composite brake shoes acting via link system directly on wheel.

Spring suspended parking/emergency brake of safety type automatic applied when air pressure falls.

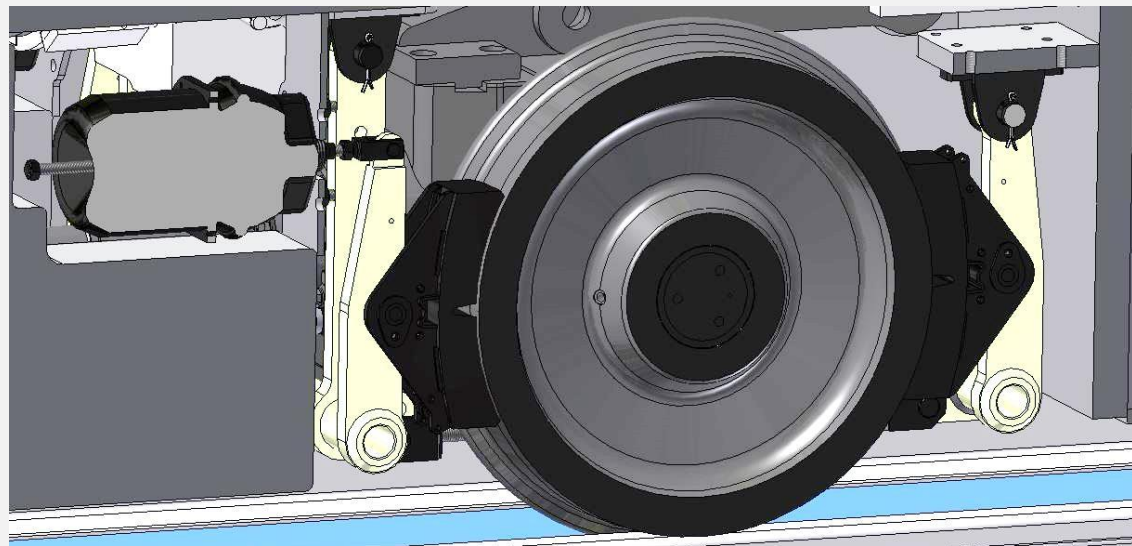

LX Locomotives - Engine

Deutz - TCD 7.8 L6 – S4

No. of cylinders	6
Displacement L	7.8
Max. Speed rpm	2200
Power output kW @ speed rpm	240 2200
Max. Torque Nm @ speed rpm	1400 1450
Fuel consum. g/kWh	192

*Using approx. 50% of power 120 kW
diesel consumption is 27,6 l/h.
100% = 55,2 l/h.*

Deutz refers to diesel with a density of 0.835 kg/dm³ at 15°C.



LX Locomotives - Engine

Volvo – TAD 573 VE - S4

No. of cylinders	6
Displacement L	7.7
Max. Speed rpm	2200
Power output kW @ speed rpm	235 2200
Max. Torque Nm speed rpm	1300 @ 1450
Fuel consum. g/kWh	212

*Using approx. 50% of power 120 kW diesel consumption is 30,3 l/h.
100% = 59,3 l/h.*


Volvo refers to diesel with a density of 0.8400 kg/dm³.



LX Locomotives - Fogmaker

FOGMAKER
INTERNATIONAL AB

1. Accumulator with pressurized extinguishing fluid is connected to
2. Distribution system with nozzles in engine room.
3. The detector bottle pressurized 24 bar connected to
4. Detection system made of polymer tube.
5. The accumulator and detector bottle is inter-linked via valve.
6. If there is a fire – the detection tube bursts, the pressure falls in the detection system and the valve in the piston accumulator opens.

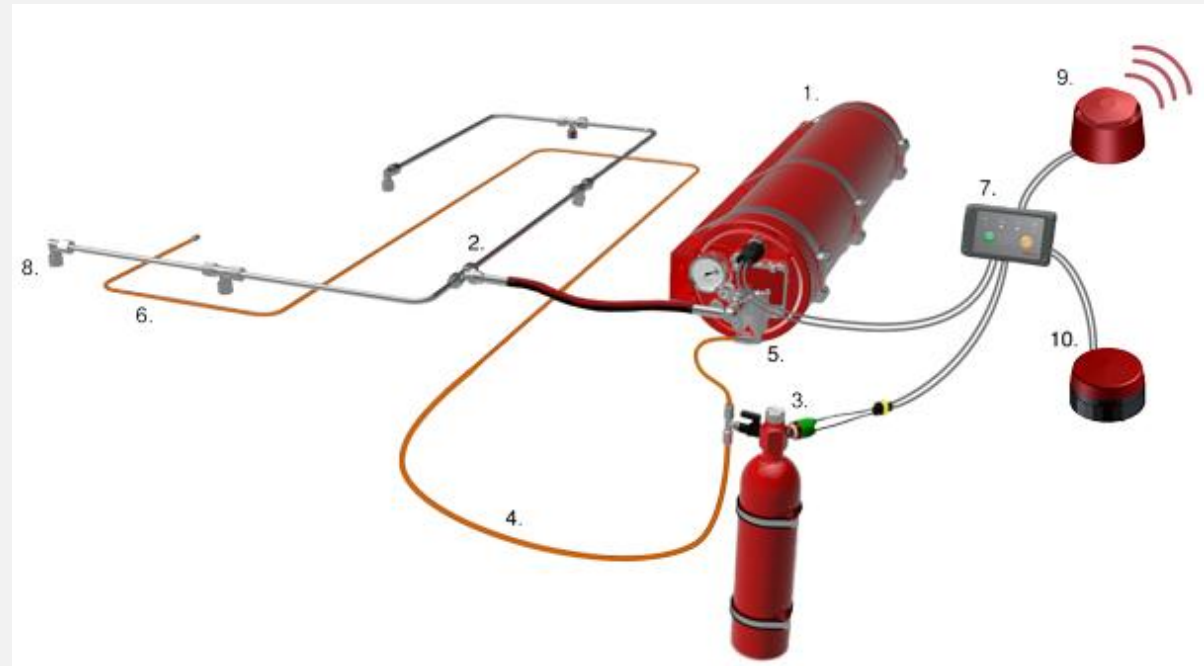


7. The pressure switch warns the driver via the alarm panel, sound- (9) and light signals (10). The extinguishing fluid is pressed through the distribution system's nozzles and a water mist is spread in the protected compartment (8).

1 litre of extinguishing fluid absorbs 540 000 kilocalories and produces 1700 litres of water mist at the same time.


ANSUL available as option.

LX Locomotives - Shipping

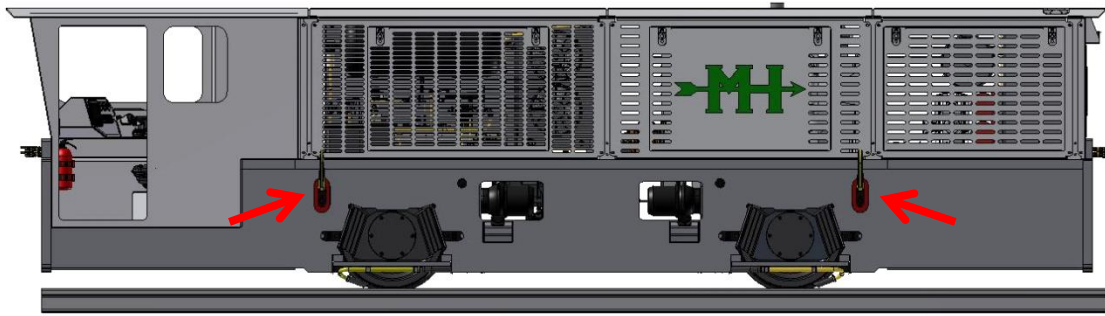

The LX locomotive up to 25 ton fits in a 40" container. In the container the loco stands on track for easy unloading.

4 lifting points incl. a set lifting hooks if crane works is needed.

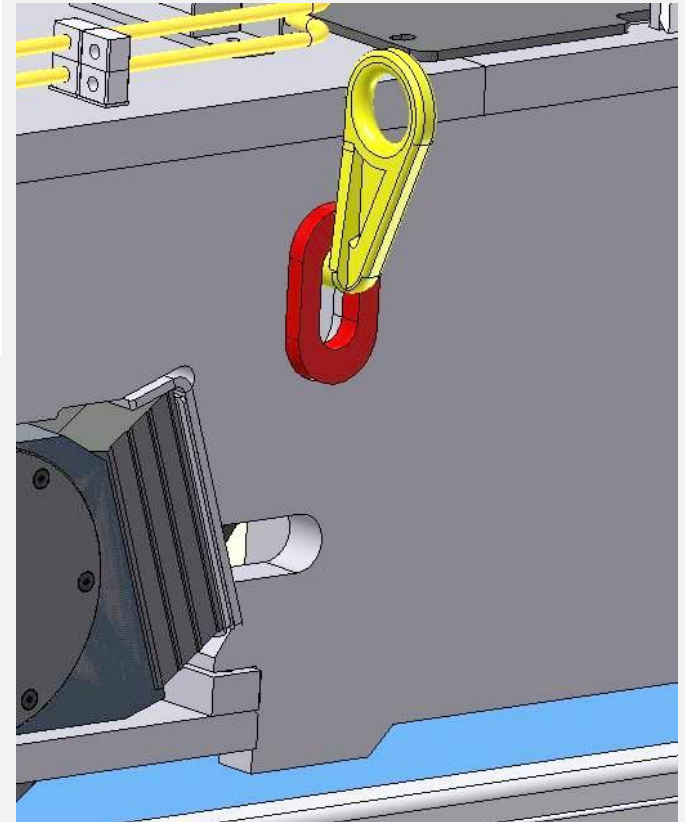



***Thank
You***

